


# Radar distance measuring sensors

RR30.DAH5-11167367

**dimension drawing**

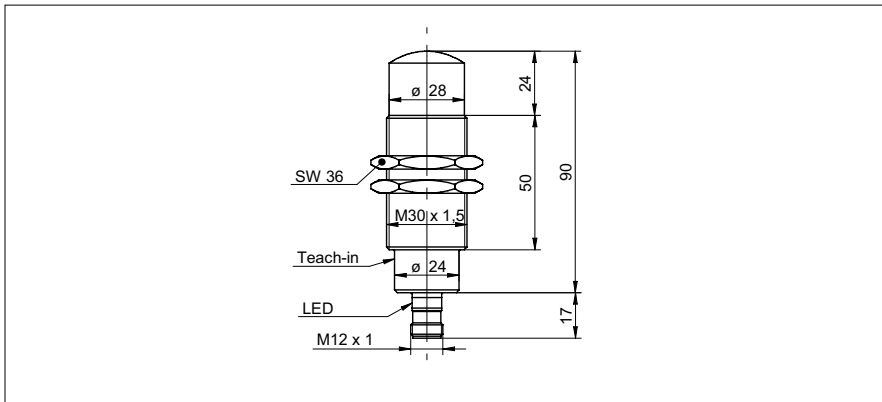


**general data**

scanning range Sd	0,3 ... 40 m
scanning range close limit Sdc	0,3 ... 40 m
scanning range far limit Sde	0,3 ... 40 m
repeat accuracy	< 1 mm
response time ton	< 6,5 ms
release time toff	< 6,5 ms
temperature drift	<± 10 mm (Full Scale)
adjustment	qTeach
alignment aid	light indicator flashing
light indicator	LED yellow
power on indication	LED green
carrier frequency	122 ... 123 GHz
band width	1 GHz
range resolution	500 mm
hysteresis typ.	40 mm
linearity error	± 4 mm
modulation type	FMCW
transmitting power (EIRP)	< +20 dBm
aperture angle	6 °
MTTF	> 123 years
approvals/certificates	Ecolab Approved for European Union, USA, Canada FCC / CFR-47 part 18 (USA, Canada) EN / 305 550-1 V.1.2.1 (European Union) EN / 305 550-2 V.1.2.1 (European Union)

**photo**



**connection diagram**

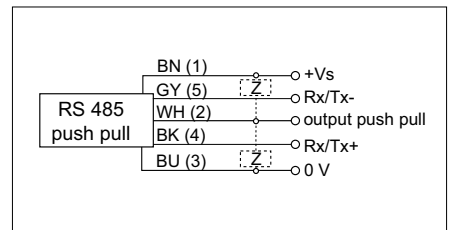

proTect<sup>+</sup>



- Scanning range Sd 8,5 m or 40 m selectable via command

## Radar distance measuring sensors

**RR30.DAH5-11167367****mechanical data**

type	cylindrical threaded
housing material	stainless steel 1.4404 (V4A)
width / diameter	30 mm
height / length	90 mm
connection types	connector M12

**ambient conditions**

operating temperature	-40 ... +65 °C
storage temperature	-40 ... +85 °C
protection class	IP 68/69K & proTect+